

Please read and save this Repair Parts Manual. Read this manual and the General Operating Instructions carefully before attempting to assemble, install, operate or maintain the product described. Protect yourself and others by observing all safety information. The Safety Instructions are contained in the General Operating Instructions. Failure to comply with the safety instructions accompanying this product could result in personal injury and/or property damage! Retain instructions for future reference. AMT reserves the right to discontinue any model or change specifications at any time without incurring any obligation.

©2021 AMT Pump Company, A Subsidiary of The Gorman-Rupp Company, All Rights Reserved.

Periodic maintenance and inspection is required on all pumps to ensure proper operation. Unit must be clear of debris and sediment. Inspect for leaks and loose bolts. Failure to do so voids warranty.

Mounting Frame



DESCRIPTION

A200-90: Mounting frame for 145/182/184/213/215JM motor driven pumps.

A201-90: Mounting frame for 254/284JM motor driven pumps (excludes 430A-95).

SPECIFICATIONS

Material: Steel Plate

Finish: Paint or powder coated finish, color: black

Weight: A200-90 = 44 lbs. [20 kg]

A200-91 = 62 lbs. [28 kg]

Overall dimensions (max): 30" [762mm] long

14.2" [360mm] wide

5.1" [130mm] tall

GENERAL

Mounting frame is designed to support a pump end and driver while also providing a convenient way to secure the entire assembly to a suitable grounding base plane.

GROUNDING BASE PLANE

Mounting frame must be secured to a grounding base plane. Grounding plane must be flat, level, and of sufficient strength and size to support the entire frame/driver/pump assembly along with any loads the piping system generates. Frame is designed to provide a convenient form of mounting the driver/pump. It is not designed to handle excessive piping system loads or provide total support in and of itself. Frame is designed to transfer the loads to a flat grounding base plane that supports the entire frame. If frame is not supported correctly, damage to frame and pump assembly may occur.

FRAME MOUNTING FASTENER LAYOUT

Refer to Figure 1

Frame mounting holes are sized to accommodate 3/8" [10 mm] diameter fasteners. Ref. Drawing 1 is provided for fastener spacing and layout. Due to dimensional tolerances and assembly variations, it is best to measure your actual unit to determine the exact fastener spacing before installation.

VIBRATION

Mounting frame can be fastened directly to the grounding plane, but if unit vibration is excessive during operation, pump damage may occur. Some form of vibration dampening mount between pump/frame assembly and grounding plane should be considered.

PUMP/DRIVER TO FRAME MOUNTING

Refer to Figure 2

If A200-90 or A200-91 mounting frame is purchased as an accessory to be mounted to a pump in the field, adhere to the following instructions:

- Measure vertical distance from pump end support foot or casing bottom to motor mounting foot.
- If distance is 0 to 1.3", fasten motor to frame "driver mount" with bolts, nuts and washers.
- If distance is 1.3" to 2", the driver support must first be repositioned. Remove four M12 bolts holding driver mount to mounting rails. Move driver mount up and install M12 bolts into lower set of holes in driver mount. Realign frame cross members. Torque bolts to 35 ft-lb [47 N-m]. Fasten motor to driver mount with bolts, nuts and washers.
- If distance is greater than 2.1", motor must be spaced above driver mount as needed. Adding spacers will void any warranty.
- Loosen four M12 bolts securing pump support to mounting rails. Slide pump support up until it supports the pump foot or casing bottom. If pump foot has provisions for mounting bolts, holes must be drilled into the pump support at the appropriate locations. Secure pump foot with appropriate fasteners (not provided).

A200-91 AUXILIARY PLATE MOUNTING

To mount 254/284JM motors to A200 frame

- First install auxiliary plate A200-105-01. Position plate on A200 driver mount with engraved part number towards the pump support. Center plate on motor support aligning six 3/8-16 tapped holes with through holes in motor support.
- Install six 3/8-16x1 hex screws provided securing plate to driver mount. Torque to 26 ft-lb.
- Mount motor foot to plate with appropriate length 1/2-13 hex screws (not provided).
- To mount 487 series pump casing (when equipped with 254JM XP Hazardous Duty Motor) to pump support. First install auxiliary plate A200-106-01.
- Position plate on A200 pump support with engraved part number towards open end of frame away from motor support. Align two through holes in plate with slots in pump support.
- Install two 3/8-16 hex bolts, flat washers and hex nuts. Final torque 25 ft-lb. after final alignment.
- Mount casing feet to plate with appropriate length 3/8-16 screws with flat washers. Torque bolts sufficiently to secure casing to plate.

REPAIR/REPLACEMENT PARTS

Mounting frame is available as a complete unit only. Replace entire unit if damage occurs.

Mounting Frame

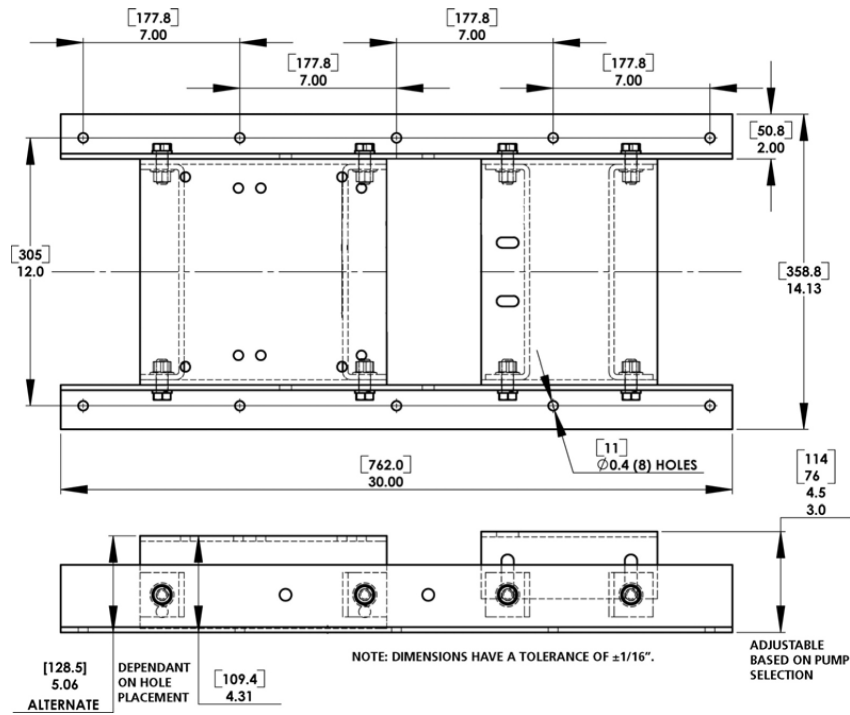


Figure 1

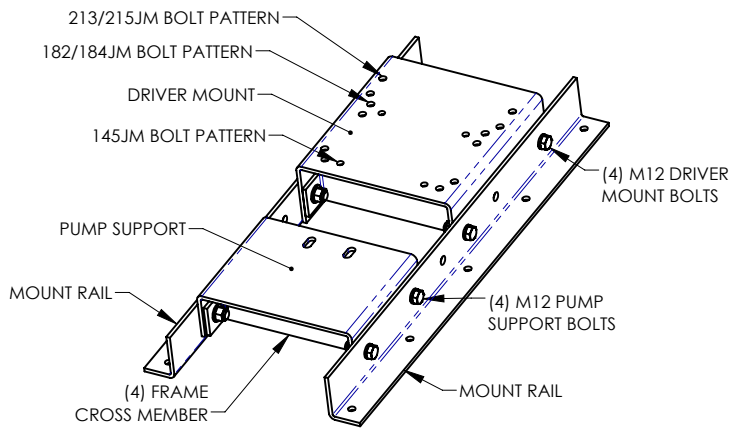


Figure 2


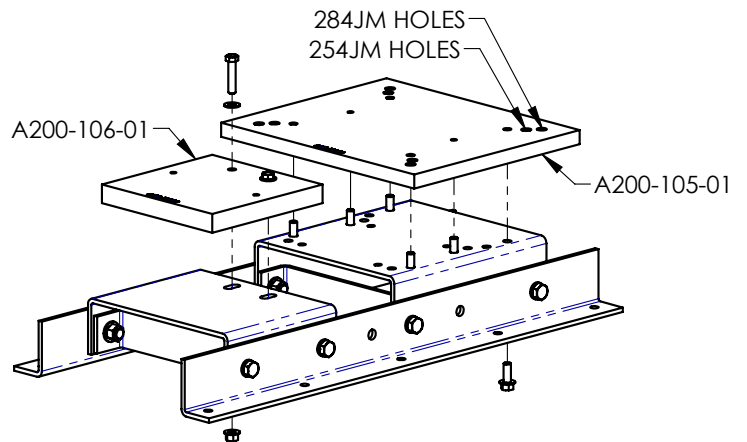


Figure 3



AMT Pump Company
(herein "AMT")
400 Spring Street
Royersford, PA 19468
Phone: (610) 948-3800
Fax: (610) 948-5300
www.amtpump.com



General Information

SALES POLICY: AMT products are sold through our established Distributors. We do not sell direct to the consumer or organization not entitled to trade recognition. Therefore, possession of our catalogs and/or price list(s) does not infer an offer to sell.

MINIMUM ORDER: We appreciate your order, however, all orders are subject to a minimum \$35.00 net invoice charge (excluding freight). This applies to all pump and parts purchase orders.

PRICES: Prices are subject to change without notice. All orders accepted are subject to prices in effect at time of shipment.

PAYMENT TERMS: Terms, upon establishment of credit, are Net 30 days. Past due accounts may be subject to a service charge of 1.5% per month. Domestic or assignable letter of credit is required for all export trade.

PAST DUE ACCOUNTS: AMT reserves the right to withhold open account shipments on any past due account. Invoices are considered past due after thirty (30) days. In the interest of sound business, all orders are subject to approval of the Credit Department.

SHIPPING INSTRUCTIONS: All shipments will be made F.O.B. the factory. Where instructions for shipment do not appear on the order, the shipment will be made according to our best judgment. Full risk of loss (including transportation delays and losses) shall pass to the customer upon delivery of the products to the carrier at the F.O.B. point. When loss or delay occurs, primary responsibility for tracing rests with the customer. When there is LOSS or APPARENT VISIBLE DAMAGE to a shipment, when tendered for delivery, **DO NOT** give the carrier a clear receipt. Note such damage on the carrier's delivery receipt and **HAVE THE DRIVER SIGN THE RECEIPT.**

PRODUCT REVISIONS: AMT reserves the right to discontinue, change or improve its products or any portions thereof without being obligated to provide such a change or improvement for units sold and/or shipped prior to such a change or improvement.

LEAD TIME: Products designated "Quick Ship Product", also referred to as "QSP" will normally be shipped within 24 hours of receipt of a non-cancellable purchase order. Only limited quantities of "QSP" pumps are available.

STANDARD LEAD TIME: Lead time is two weeks for all non "QSP" product. AMT reserves the right to revise lead times as required due to availability of materials and all other causes beyond our control.

VIP SHIPMENT: Select AMT and IPT branded pumps are available for next day shipment for non-QSP (Quick Ship Products) items and subjected to a specific model surcharge per unit noted in the respective price book. Requires calling for availability, confirmation and a non-cancellable purchase order or credit card payment prior to shipment. The expedited shipping charges are an additional cost added separately from the VIP charges per item. AMT reserves the right to revise lead times as required due to availability of materials and all other causes beyond our control. QSP quantities are limited as determined by AMT.

ALL purchase orders must be submitted via hard copy sent to AMT customer service department by fax, EDI or e-mail.

RETURN GOODS POLICY: Goods shall not be returned without a return goods authorization number (RGA) issued by AMT customer service. The RGA number must be listed on the packing list. Only current model and part numbers with a valid date code may be returned (within one year from date of purchase). **A 20% restocking and packaging charge will apply to all returns. All shipping charges must be pre-paid. No exceptions.**

ORDER CHANGES BY CUSTOMER: Orders in process may not be changed except with written consent and may be subject to special charges.

12 Month Limited Warranty

EXTENT AND DURATION OF LIMITED WARRANTY

Coverage: AMT Pump Company (herein "AMT") or IPT Pumps by Gorman-Rupp (herein "IPT") or Gorman-Rupp Industries Division of The Gorman-Rupp Company, Patterson, or the Gorman-Rupp Company (herein referred to as "G-R Unit") each individually warrants that its products and parts shall be free from defects in material and workmanship for twelve (12) months from the date of purchase by the original end user when installation is made and maintenance is performed in accordance with G-R Unit's recommendations. Wear and tear resulting from use and items normally consumed in use are not covered.

EXCEPTIONS

(A) This Limited Warranty shall not apply to mechanical seals in AMT or IPT pumps and the following products and parts: engines, motors, trade accessories and all other products, components, parts and materials not manufactured by the G-R Units. These items may, however, be covered by the warranties of their respective manufacturers. (B) This warranty does not extend to or apply to any unit which has been repaired or altered at any place other than by a G-R Unit, or by persons not expressly approved by a G-R Unit to make repairs or alterations, nor to any unit the serial number, model number or identification of which has been removed, defaced or altered. (C) This warranty does not extend to any product manufactured by a G-R Unit, which has been subjected to mis-use, neglect, accident, improper installation, or use in violation of instructions furnished by a G-R Unit. (D) Pump Kits: This warranty does not extend to any product sold by a G-R Unit unassembled as a Pump Kit. Pump Kits are warranted against defects in material and workmanship for 60 days from the date of shipment from a G-R Unit. Any Pump Kit parts deemed defective by a G-R Unit will be replaced free of charge within 60 days of shipment. Pump Kits are not returnable for credit.

LIMITATIONS


THE G-R UNITS' SOLE AND EXCLUSIVE WARRANTY WITH RESPECT TO THEIR PRODUCTS AND PARTS IS THIS LIMITED WARRANTY. THIS LIMITED WARRANTY IS IN LIEU OF ALL OTHER EXPRESS AND/OR IMPLIED WARRANTIES, INCLUDING IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR PARTICULAR PURPOSE.

EXCLUSIVE REMEDY AND DAMAGES


The sole and exclusive remedy for breach of this Warranty by a G-R Unit and the entire extent of its liability for such breach or for damages arising from the use of the products and parts covered under this Limited Warranty, shall be as follows:

1. **Repair or Replacement:** If inspection shows that any G-R Unit product or part covered under this Limited Warranty is defective in materials or workmanship, the G-R Unit shall repair or replace the defective or non-conforming product or part without charge, whichever the G-R Unit chooses. You must have properly maintained and used the product or part claimed to be defective in accordance with the maintenance schedule or manual, which comes with the product. No allowance will be made for labor, installation, removal, transportation or other charges incurred by you in connection with such repair or replacement.
2. To obtain the above remedy:
 - A. Immediately notify the G-R Unit upon discovery of the claimed defect in materials or workmanship and provide the serial number or date code of the product and/or part(s) or provide the G-R Unit with the invoice or bill of sale referencing the product by no later than the expiration date of the warranty period.
 - B. The G-R Unit will advise whether inspection will be necessary and how whether repair or replacement will be made. If inspection by the G-R Unit is necessary, the pump or defective part must be sent freight pre-paid to the G-R Unit. Return shipment will be F.O.B. the G-R Unit's plant.
 - C. **Return Goods Authorization Requirement:** No product will be accepted for return or replacement without the prior written authorization of the G-R Unit. Upon such authorization, and in accordance with instructions from the G-R Unit, the product will be returned to the G-R Unit, shipping charges prepaid by the Buyer.
3. **Damages:** The G-R Unit's liability for damages for breach of this Limited Warranty shall not exceed the amount of the purchase price of the product or part(s) in respect to which Such damages are claimed. **IN NO EVENT SHALL THE G-R UNITS BE LIABLE FOR INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES FOR BREACH OF THIS LIMITED WARRANTY.**

Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This Limited Warranty gives you specific legal rights, and you may also have other rights, which vary from state to state.

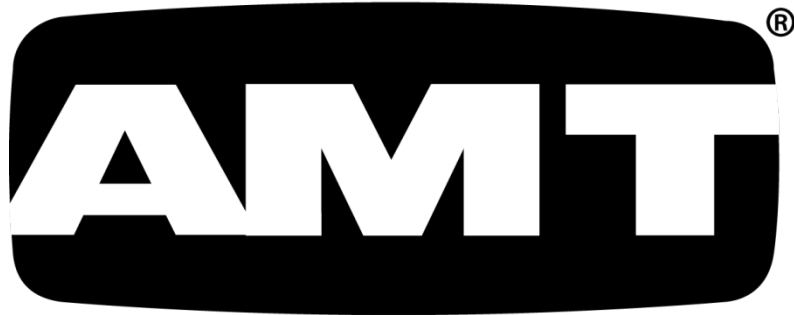

A Gorman-Rupp Company

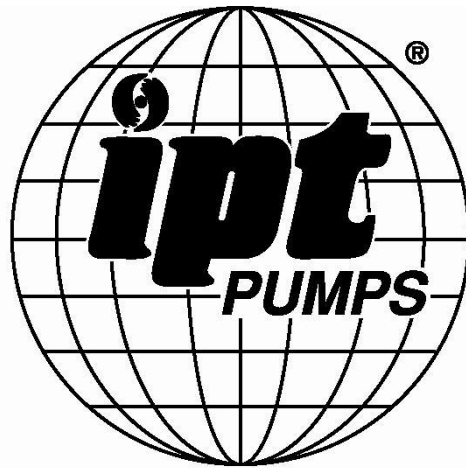

BY
GORMAN-RUPP®

www.amtpump.com